


1. Specifications

DC Voltage :	0-1-2.5-5-10-25-50-100-250-500-1,000 V (20,000 Ω /V)
AC Voltage :	0-1-2.5-5-10-25-50-100-250-500-1,000 V (20,000 Ω /V)
DC Current :	0-50 μ A-2.5 mA-25 mA-500 mA
AC Current :	0-5 (or 0-10A)
Resistance :	0-5K-50K-500K-5M Ω
Decibel :	-20 ~ +22 dB (0 dB=1mW, 600 Ω)
Accuracy :	DC Voltage 3% of full scale
	AC Voltage 3% of full scale (above 5V range)
	5% of full scale (1V, 2.5V range)
	DC Current 3% of full scale
	AC Current 4% of full scale
	Resistance 3% of scale length
Internal Battery :	2 $\times$ UM-3 Battery
Dimensions :	185 mm (7 ⁹ / ₃₂ ") $\times$ 100 mm(4") $\times$ 44 mm(1 ⁴⁷ / ₆₄ ")
Weight :	Approx. 400 g (0.9 lbs)

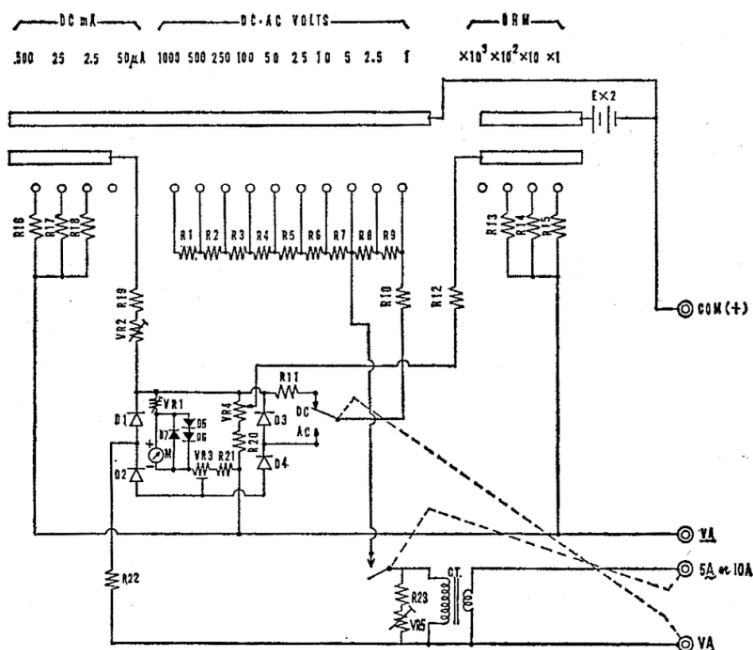

Kyoritsu

KYORITSU ELECTRICAL INSTRUMENTS WORKS, LTD.

Printed in Japan